


KDP 穿墙板系统 Cable entry plate



节约时间和成本 Time savings & Cost reductions

在安装电缆时，使用穿墙板可以实现埋单和成本的节省。将电缆插入相应的穿孔，拉至需求的长度即可。电缆和气管都适用。

When installing cable, push the cable through the opening appropriate, pull cable through to desired length, the cable entry plate is an entry and fastening system for cables and / or pneumatic hoses

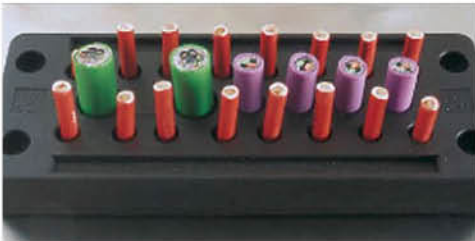

安装密度高，外观平整 High packing density

设计严密，穿孔排列紧密。

Compact design, high packing density, wide variety of frames and inserts.



无须工具安装迅速 Assembly without tools

在厚度约 1.5mm 至 2mm 的壁面上，只要将其嵌入在已预先安装好的（切口）位置即可。KDP 面板上另有 4 个螺孔（M5），可根据需要提高其安装的牢固性。

Snap-in at plate thicknesses of 1.5–2.0mm or screwing in place.



极高的保护等级 High protection class

通过内置的保护层和防护圈使防护等级达到 IP65。

The plastic cable entry plates with improved clip-in function, it enables tool-less, rational connection technology for the wiring of machines and equipment with the high ip class 65.



密封性和抗拉性 Of tightness and tension

电缆通过后，穿孔会自觉产生密封性和抗拉性，因为橡胶铸成的穿孔具有锁住功能，因此即使被重复使用，穿孔的密封和抗拉性能不变。

After the passage of cables, perforation of automatically generated tightness and tension, because the rubber cast of perforation with lock function, so even if reused, sealing and tensile properties of perforated unchanged.



封闭式穿孔 A closed perforation

封闭式穿孔具有特殊的密封机构，因此尽管管内预留了孔眼，其密封性依然良好。因此穿孔可以被重复使用，线缆拔出之后密封塞将再次密封该穿孔。

Closed perforation with special sealing mechanism, so set aside hole within a hole, its seal is still good. Perforation can be reused, cable pull out sealing plug will be sealed again after the piercing.

KDP 电缆引入系统 CABLE ENTRY SYSTEMS

穿墙板系统 Cable entry plate KDP/N 24/X




优点 Benefits

- 节约空间 Extremely low space requirement
- 防护等级 Protection class IP65
- 内置密封结构 Built-in sealing structure
- 一穿式使用方式 Assembly without tools
- 带有线缆标识的可能性
Cable & plug manufacturer's system guarantee remains valid

材料 Material

材质 Properties: 改进型尼龙 (不含卤素)
halogen-free, silicone-free
温度范围 Temperature range: -30°C to +70°C
防护等级 Protection degree: IP65
阻燃性能 Flame class (UL94): V0
颜色 Color: 黑色 black

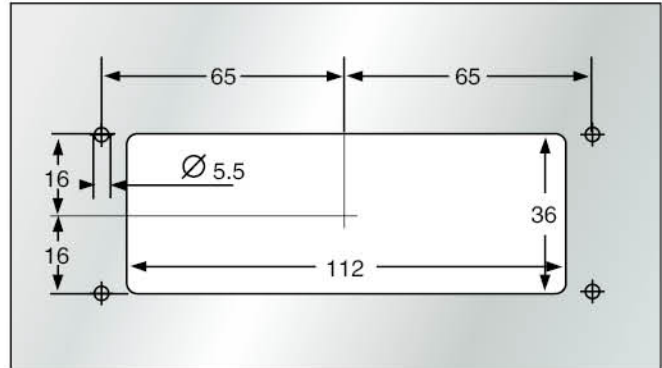

技术参数 Technical data

- 切割面 Cut-out dimensions 112 × 36mm
- KDP 外部尺寸 External dimensions: L=147mm × B=59mm × 15 mm
- 抗拉性能符合 Strain relief according DIN/EN 50262/98
- 抗弱酸弱碱

型号 Type	订货号 Part No.	夹线范围 Clamping range (mm)									穿线数量 Openings quantity
		1.5-2.6	2.5-5.0	3.0-6.5	4.1-8.1	5.0-9.2	8.0-12.5	9.0-14.0	9.6-15.9	14.0-20.0	
KDP/N 24/11	97301110	---	---	4	---	4	---	---	---	3	11
KDP/N 24/12	97301120	---	---	---	---	---	12	---	---	---	12
KDP/N 24/13	97301130	---	---	2	6	---	---	4	---	1	13
KDP/N 24/14	97301140	---	---	6	---	4	---	---	4	---	14
KDP/N 24/17	97301150	---	---	---	---	17	---	---	---	---	17
KDP/N 24/17-1	97301151	---	---	11	1	---	5	---	---	---	17
KDP/N 24/22-1	97301160	---	---	16	---	4	2	---	---	---	22
KDP/N 24/22	97301161	---	---	15	---	6	---	---	---	1	22
KDP/N 24/23	97301170	---	---	---	23	---	---	---	---	---	23
KDP/N 24/29	97301180	---	---	29	---	---	---	---	---	---	29
KDP/N 24/29-1	97301181	---	---	26	---	3	---	---	---	---	29
KDP/N 24/80	97301190	78	2	---	---	---	---	---	---	---	80
BP/N 24	97171624	---	---	---	---	---	---	---	---	---	0