



线缆整理系统 STRAIN RELIEF SYSTEMS

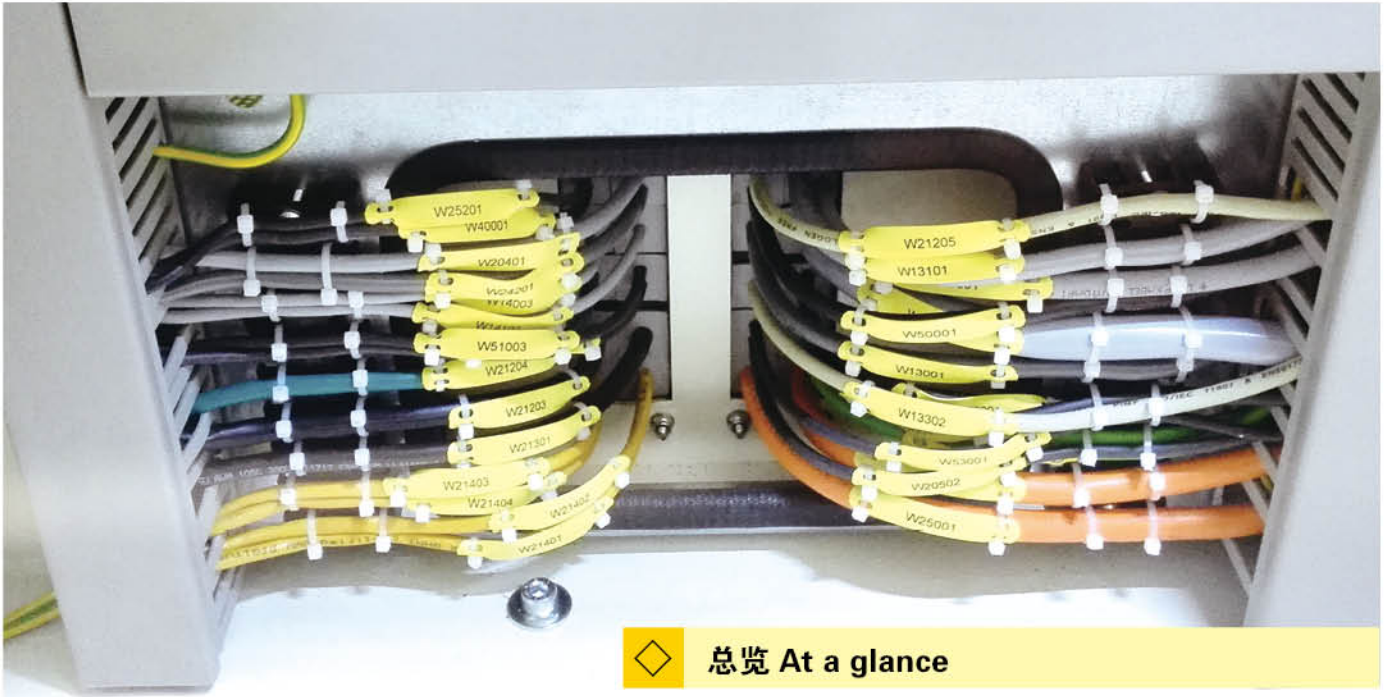

◇ 总览 At a glance

通过使用 SVLES 的线缆整理系统，使用者可以快速的安装、整理电缆，并且提供一定的张紧力。
线缆整理系统适用于整理和固定在机械设备，开关柜，其他机壳等中的电缆。

By using SVLES strain relief systems the user can quickly assemble, organize and provide strain relief for cables.
The systems can be used for organizing and securing cables in machines, switch cabinets, enclosures and dynamic cable carriers.

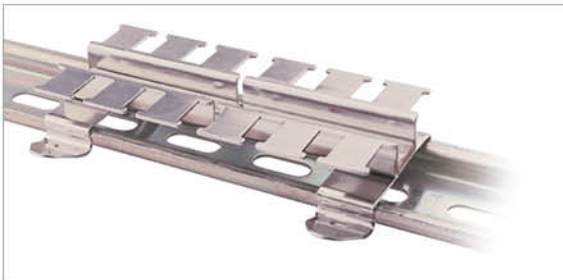

◇ 优势 Benefits

1. 灵活

SVLES 线缆整理板提供多种安装方式，配套使用各种不同规格的 DIN 导轨或者螺钉完成安装。

2. 轻松、快速安装

用标准型尼龙扎带快速固定电缆线。

3. 稳定性

线缆整理板的独特外形可以牢牢的固定电缆。

4. 很高的安装密度

线缆整理板有几种尺寸，通过多层安装来大大提高安装密度。

1. Flexible

Because of the many different types of DIN rails and screw type assemblies, SVLES offers numerous mounting options.

2. Fast and easy assembly

Securing the cables is done quickly and inexpensively with standard cable ties.



3. Secure hold

The unique shape of the strain relief securely holds the cable tie and cable.


4. High packing density

The strain relief plates are available in several sizes. By multilayer mounting the packing density can be greatly increased.

SVL-ZKL 线缆整理板 STRAIN RELIEF PLATES

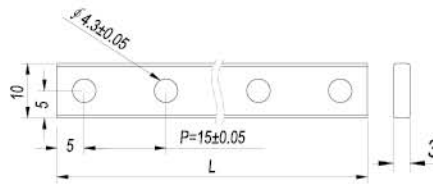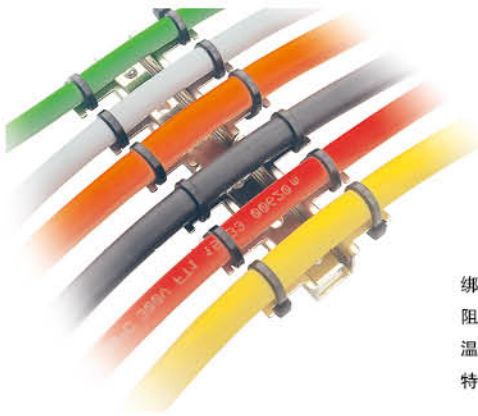

ACR10 导轨尺寸图

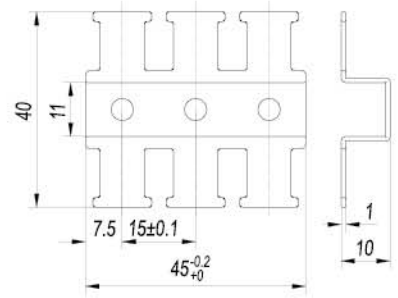


绑线板尺寸图


绑线板材料 Material: 热轧钢板
 阻燃等级 Flame class: UL-94 V0, 自熄灭 Self-extinguishing
 温度范围 Temperature: -40℃ to +140℃ (静态 Static)
 特性 Properties: 无卤, 无硅 Halogen-free, silicone-free

	型号 Type	订货号 Part No.	绑线板尺寸 Size	导轨长度 Length L	锯齿数量 No. of teeth
SVL-ZKL 线缆整理板	SVL-ZKL 39	932351	45 mm	40 mm	3
	SVL-ZKL 60	932352	90 mm	85 mm	6
	SVL-ZKL 70	932353	135 mm	130 mm	9
	SVL-ZKL 87	932354	180 mm	175 mm	12
SVL-ZL 线缆整理板	SVL-ZL 39	900231	45 mm	40 mm	3
	SVL-ZL 60	900232	90 mm	85 mm	6
	SVL-ZL 70	900233	135 mm	130 mm	9
	SVL-ZL 87	900234	180 mm	175 mm	12

SVL-ZD 线缆整理板 STRAIN RELIEF PLATES

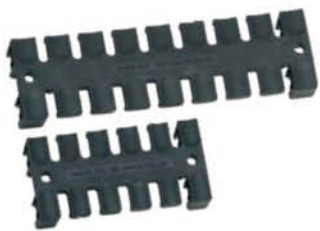

材料 Material: 聚酰胺 (尼龙) Polyamide
 阻燃等级 Flame class: UL-94 V0, 自熄灭 Self-extinguishing
 温度范围 Temperature: -40℃ to +140℃ (静态 Static)
 特性 Properties: 无卤, 无硅 Halogen-free, silicone-free

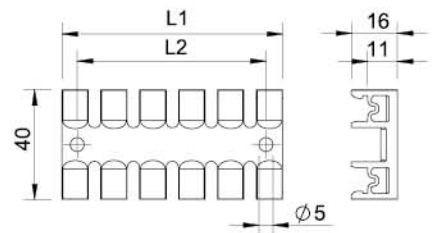

型号 Type	订货号 Part No.	长度 Length L1	长度 Length L2	锯齿数量 No. of teeth	包装数量 PU	备注 Remarks
SVL-ZD 80 (L1:79,L2:68)	900131	79.5 mm	68.0 mm	6	10	绑扎 6 根线
SVL-ZD 140 (L1:139,L2:128)	90032	139.5 mm	128.1 mm	9	10	绑扎 9 根线