

KEL 电缆引入系统 CABLE ENTRY SYSTEMS


KEL 24-E 可开式穿墙板




框架型号 Type	示意图 Description	KT 模块数量 Inserts 小 small / 大 large
<p>KEL 24/15-E</p> <p>框架订货号 Part No. 99042209</p> <p>模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications</p>		15 / -
<p>KEL 24/12-E</p> <p>框架订货号 Part No. 99042208</p> <p>模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications</p>		11 / 1
<p>KEL 24/9-E</p> <p>框架订货号 Part No. 99042207</p> <p>模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications</p>		7 / 2

材料 Material: 聚酰胺 Polyamide (PA)
 阻燃等级 Flame class: UL94-V0, 自熄灭 Self-extinguishing
 防护等级 Protection degree: IP54, 使用密封垫且正确选择穿芯规格
 (符合 DIN EN 60529:2000-09)
 With gasket and correct selection of
 the cable inserts
 温度范围 Temperature: -40°C to +140°C (静态 Static)
 特性 Properties: 无卤, 无硅 Halogen-free, silicone-free
 开孔尺寸 Cut-out dimensions: 62 × 110 mm
 KEL 高度 Height: 17 mm

开孔尺寸 Platemounting dimensions

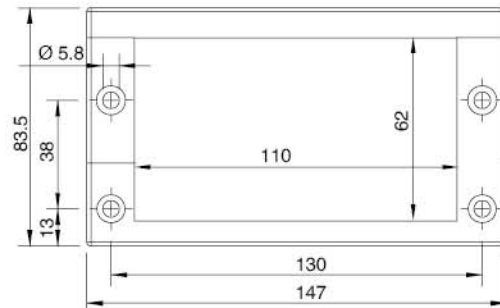


KEL 24-MT 可开式穿墙板



框架型号 Type	示意图 Description	KT 模块数量 Inserts 小 small / 大 large
<p>KEL24/20-MT</p> <p>框架订货号 Part No. 99042232</p> <p>模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications</p>		20 / -
<p>KEL24/17-MT</p> <p>框架订货号 Part No. 99042224</p> <p>模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications</p>		16 / 1
<p>KEL 24/14-MT</p> <p>框架订货号 Part No. 99042225</p> <p>模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications</p>		12 / 2
<p>KEL 24/8-MT</p> <p>框架订货号 Part No. 99042221</p> <p>模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications</p>		4 / 4


材料 Material: 聚酰胺 Polyamide (PA)
 阻燃等级 Flame class: UL94-V0, 自熄灭 Self-extinguishing
 防护等级 Protection degree: IP54, 使用密封垫且正确选择穿芯规格
 (符合 DIN EN 60529:2000-09)
 With gasket and correct selection of
 the cable inserts
 温度范围 Temperature: - 40°C to + 140°C (静态 Static)
 特性 Properties: 无卤, 无硅 Halogen-free, silicone-free
 开孔尺寸 Cut-out dimensions: 82 × 110 mm
 KEL 高度 Height: 17 mm

开孔尺寸 Platemounting dimensions

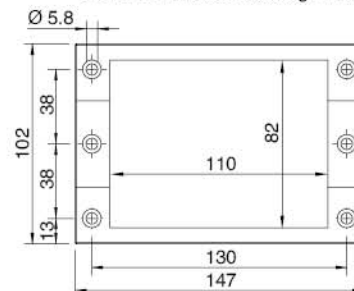

KEL 电缆引入系统 CABLE ENTRY SYSTEMS

KEL 24-2MT 可开式穿墙板



框架型号 Type	示意图 Description	KT 模块数量 Inserts 小 small / 大 large
KEL 24/30-2 MT 框架订货号 Part No. 99042234 模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications		30 / -
KEL 24/27-2 MT 框架订货号 Part No. 99042233 模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications		26 / 1
KEL 24/24-2 MT 框架订货号 Part No. 99042227 模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications		22 / 2
KEL 24/21-2 MT 框架订货号 Part No. 99042226 模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications		18 / 3
KEL 24/12-2 MT 框架订货号 Part No. 99042223 模块规格见 8.3.8-8.3.9 页 See page 8.3.8-8.3.9 module specifications		6 / 6

材料 Material: 聚酰胺 Polyamide (PA)
 阻燃等级 Flame class: UL94-V0, 自熄灭 Self-extinguishing
 防护等级 Protection degree: IP54, 使用密封垫且正确选择穿芯规格 (符合 DIN EN 60529:2000-09)
 With gasket and correct selection of the cable inserts
 温度范围 Temperature: -40°C to +140°C (静态 Static)
 特性 Properties: 无卤, 无硅 Halogen-free, silicone-free
 开孔尺寸 Cut-out dimensions: 126 × 110 mm
 KEL 高度 Height: 17 mm

开孔尺寸 Platemounting dimensions

