

M23 连接器 ROUND PLUG CONNECTOR

现场接线
Field-wireable

M23 圆形连接器 Round plug connector (9,12)-pole
插针 Male 0° 法兰安装 Flange installation




M23 信号连接器

| 1 | 型号 Form | No. | 923393 | 923395 | 923394 | 923397 | 923321 | 923322 | | | | | | | | | | | | | |
|-----------------|---|--|---|--------------------------------------|--------------------------------------|---|--------------------------------------|--------------------|--------------------------|--------|--------------------------|--------|-----------------|--------------------------|--------|--------------------------|--------|-------------|--|--|--|
| | 极数 Suppression | | 9xØ1mm 9-pole | 8x1mm+1x2mm 9-pole | 9xØ1mm 9-pole | 8x1mm+1x2mm 9-pole | 12xØ1mm 12-pole | 12xØ1mm 12-pole | | | | | | | | | | | | | |
| | 尺寸图 Description | | | | | | | | | | | | | | | | | | | | |
| | 针脚排序 Contact layout | <p>插针 Male 逆时针 counterclockwise</p> | <p>插针 Male 逆时针 counterclockwise</p> | <p>插针 Male 顺时针 clockwise</p> | <p>插针 Male 顺时针 clockwise</p> | <p>插针 Male 逆时针 counterclockwise</p> | <p>插针 Male 顺时针 clockwise</p> | | | | | | | | | | | | | | |
| 2 | 技术参数 Technical data | | | | | | | | | | | | | | | | | | | | |
| | 额定电压 Supply voltage | 160 V AC/DC | | | | | | | | | | | | | | | | | | | |
| | 额定电流 Current per contact | 10A | | | | | | | | | | | | | | | | | | | |
| | 防护等级 Protection | IP67- 插孔插针配合拧紧 When plugged and screwed down | | | | | | | | | | | | | | | | | | | |
| | 温度范围 Temperature range | -20...+130°C | | | | | | | | | | | | | | | | | | | |
| | 测试电压 (两插针之间) Test voltage | 2500V | | | | | | | | | | | | | | | | | | | |
| | 外壳材料 Housing material | 锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating | | | | | | | | | | | | | | | | | | | |
| | 绝缘内嵌体材料 Insulation embedded body material | PA66/PBT, UL 94/V0 | | | | | | | | | | | | | | | | | | | |
| | 接触件 (插针) Contact element (male) | <p>Ø1mm</p> | <table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">插针 Male Ø1mm</td> <td>0.03-0.34mm²</td> <td>916101</td> </tr> <tr> <td>0.14-1.00mm²</td> <td>916121</td> </tr> <tr> <td rowspan="2">插针 Male Ø2mm</td> <td>0.50-1.50mm²</td> <td>916131</td> </tr> <tr> <td>0.50-1.50mm²</td> <td>956121</td> </tr> </tbody> </table> | | 类型 Type | 压线范围 Wire diameter | 订货号 Part No. | 插针 Male Ø1mm | 0.03-0.34mm ² | 916101 | 0.14-1.00mm ² | 916121 | 插针 Male Ø2mm | 0.50-1.50mm ² | 916131 | 0.50-1.50mm ² | 956121 | <p>Ø2mm</p> | | | |
| 类型 Type | 压线范围 Wire diameter | 订货号 Part No. | | | | | | | | | | | | | | | | | | | |
| 插针 Male Ø1mm | 0.03-0.34mm ² | 916101 | | | | | | | | | | | | | | | | | | | |
| | 0.14-1.00mm ² | 916121 | | | | | | | | | | | | | | | | | | | |
| 插针 Male Ø2mm | 0.50-1.50mm ² | 916131 | | | | | | | | | | | | | | | | | | | |
| | 0.50-1.50mm ² | 956121 | | | | | | | | | | | | | | | | | | | |
| | 订货号 Part No. | | | | | | | | | | | | | | | | | | | | |
| | 可参考: 1.0.1 Reference: 1.0.1 | | | | | | | | | | | | | | | | | | | | |
| | 1 | 型号 Form | | | | | | | | | | | | | | | | | | | |
| | 备注 Notes | | | | | | | | | | | | | | | | | | | | |
| | | 配件及技术参数页面 Accessories and technical page: 5.6.5 | | | | | | | | | | | | | | | | | | | |

M23 连接器 ROUND PLUG CONNECTOR

现场接线
Field-wireable

M23 圆形连接器 Round plug connector (17,16+3)-pole
插针 Male 0° 法兰安装 Flange installation

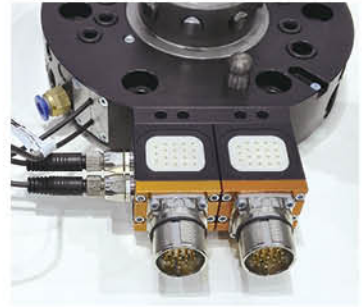

M23 信号连接器

| 1 | 型号 Form | No. | 923371 | 923372 | 923391 | 923392 | | | | | | | | | | | | | | | |
|---------------------------------|---|---|--------------------|----------------------|-----------------------------|-----------------------------|---------|--------------------|--------------|-----------------------------|--------------------------|--------|--------------------------|--------|--------------------------|--------|---------------------------------|--------------------------|--------|--------------------------|--------|
| | 极数 Suppression | | 17xØ1mm 17-pole | 17xØ1mm 17-pole | 16xØ1mm+3xØ1.5mm 19-pole | 16xØ1mm+3xØ1.5mm 19-pole | | | | | | | | | | | | | | | |
| | 尺寸图 Description | | | | | | | | | | | | | | | | | | | | |
| | 针脚排序 Contact layout | 逆时针 counterclockwise | | 顺时针 clockwise | | 逆时针 counterclockwise | | | | | | | | | | | | | | | |
| | | | | | 顺时针 clockwise | | | | | | | | | | | | | | | | |
| 2 | 技术参数 Technical data | | | | | | | | | | | | | | | | | | | | |
| | 额定电压 Supply voltage | 160 V AC/DC | | | 125 V AC/DC | | | | | | | | | | | | | | | | |
| | 额定电流 Current per contact | 10A | | | | | | | | | | | | | | | | | | | |
| | 防护等级 Protection | IP67- 插孔插针配合拧紧 When plugged and screwed down | | | | | | | | | | | | | | | | | | | |
| | 温度范围 Temperature range | -20...+130°C | | | | | | | | | | | | | | | | | | | |
| | 测试电压 (两插针之间) Test voltage | 2500V | | | | | | | | | | | | | | | | | | | |
| | 外壳材料 Housing material | 锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating | | | | | | | | | | | | | | | | | | | |
| | 绝缘内嵌体材料 Insulation embedded body material | PA66/PBT, UL 94/V0 | | | | | | | | | | | | | | | | | | | |
| | 接触件 (插针) Contact element (male) | <table border="1"> <thead> <tr> <th>类型 Type</th> <th>压线范围 Wire diameter</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td rowspan="3"> Ø1mm 插针 Male Ø1mm </td> <td>0.03-0.34mm²</td> <td>916101</td> </tr> <tr> <td>0.14-1.00mm²</td> <td>916121</td> </tr> <tr> <td>0.50-1.50mm²</td> <td>916131</td> </tr> <tr> <td rowspan="2"> Ø1.5mm 插针 Male Ø1.5mm </td> <td>0.24-1.00mm²</td> <td>936101</td> </tr> <tr> <td>0.50-1.50mm²</td> <td>936121</td> </tr> </tbody> </table> | | | | | 类型 Type | 压线范围 Wire diameter | 订货号 Part No. | Ø1mm 插针 Male Ø1mm | 0.03-0.34mm ² | 916101 | 0.14-1.00mm ² | 916121 | 0.50-1.50mm ² | 916131 | Ø1.5mm 插针 Male Ø1.5mm | 0.24-1.00mm ² | 936101 | 0.50-1.50mm ² | 936121 |
| 类型 Type | 压线范围 Wire diameter | 订货号 Part No. | | | | | | | | | | | | | | | | | | | |
| Ø1mm 插针 Male Ø1mm | 0.03-0.34mm ² | 916101 | | | | | | | | | | | | | | | | | | | |
| | 0.14-1.00mm ² | 916121 | | | | | | | | | | | | | | | | | | | |
| | 0.50-1.50mm ² | 916131 | | | | | | | | | | | | | | | | | | | |
| Ø1.5mm 插针 Male Ø1.5mm | 0.24-1.00mm ² | 936101 | | | | | | | | | | | | | | | | | | | |
| | 0.50-1.50mm ² | 936121 | | | | | | | | | | | | | | | | | | | |
| | 订货号 Part No. | | | | | | | | | | | | | | | | | | | | |
| | 可参考: 1.0.1 Reference: 1.0.1 | | | | | | | | | | | | | | | | | | | | |
| | 1 | 型号 Form | | | | | | | | | | | | | | | | | | | |
| | 备注 Notes | 配件及技术参数页面 Accessories and technical page: 5.6.5 | | | | | | | | | | | | | | | | | | | |