

# M40 连接器 ROUND PLUG CONNECTOR

M40 圆形连接器  
Round plug connector

现场接线  
Field-wireable

3+PE+2-pole

3+PE+4-pole

插孔 Female  
直线 Straight




插孔 Female  
直线 Straight



## 1 型号 Form No. 940661 940681

极数 Suppression 6p(4 × Ø3.6+2 × Ø2) 8p(4 × Ø3.6+4 × Ø2)

尺寸图 Description

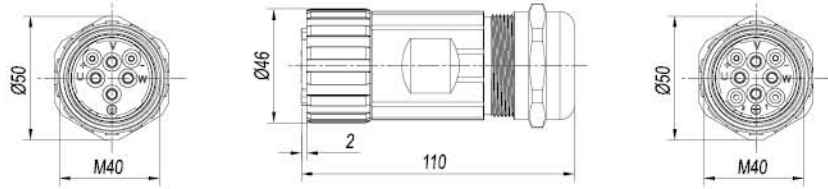

压线范围 Wire diameter 13-28mm



## 2 技术参数 Technical data

|  |  |
|--|--|
| 额定电压 Supply voltage                      | 630 V (AC/DC) / 250 V (AC/DC)                              |
| 额定电流 Current per contact                 | 75A / 30A  |
| 防护等级 Protection                          | IP67- 插孔插针配合拧紧 When plugged and screw down                 |
| 温度范围 Temperature range                   | -20...+130°C   |
| 测试电压 (两插针之间) Test voltage                | 4000V / 2500V  |
| 外壳材料 Housing material                    | 锌合金压铸件 黄铜, 镀镍 Zinc alloy die casting Brass, nickel plating |
| 绝缘内嵌材料 Insulation embedded body material | PA66/PBT, UL 94/V0   |

| 接触件 (插孔) Contact element (female)   | 类型 Type          | 压线范围 Wire diameter       | 订货号 Part No. |
|---|------------------|--------------------------|--------------|
| <br>Ø2mm   | 插孔 Female Ø2mm   | 1.00-2.50mm <sup>2</sup> | 926201       |
|   |                  | 2.50-4.00mm <sup>2</sup> | 926221       |
| <br>Ø3.6mm | 插孔 Female Ø3.6mm | 1.50-4.00mm <sup>2</sup> | 936241       |
|   |                  | 6.00mm <sup>2</sup>      | 936261       |
|   |                  | 10.00mm <sup>2</sup>     | 936281       |

## 订货号 Part No.

可参考: 1.0.1 Reference: 1.0.1

## 1 型号 Form

## 备注 Notes

配件及技术参数页面 Accessories and technical page: 5.6.5

M40 动力连接器