




CAT.5e  
M8 双端预铸线束  
Connection cable  
屏蔽 Shielded

插针 Male  
直出 Straight

插针 Male  
直出 Straight

插针 Male  
90°

插针 Male  
90°

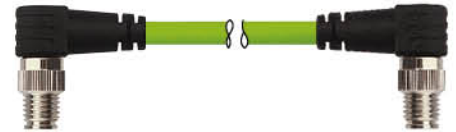

<b>1</b>	<b>型号 Form No.</b>	<b>988701</b>	<b>988721</b>
	<b>极数 Suppression</b>	4-pole	4-pole
	<b>电路图 Circuit diagram</b>		
	<b>针脚排序 Contact layout</b>		
<b>2</b>	<b>电缆类型 Cable type</b>	<b>护套颜色 Jacket color</b>	
	CAT 5e.	绿 GN	蓝 BU
	移动安装 Flexible installation PVC	795	791
	拖链安装 Highly flexible PUR	797	793
<b>3</b>	<b>电缆长度 Cable length</b>		
	1.5m	0150	
	3.0m	0300	
	5.0m	0500	
	7.5m	0750	
	10.0m	1000	
	<b>技术数据 Technical data</b>		
	工作电压 Supply voltage	30 V AC/DC	
	防护等级 Protection	插好并拧紧后 When plugged and screwed down IP65 & IP67 (EN60529)	
	温度范围 Temperature range	-25...+85°C , 取决于电缆质量	
	<b>订货号 Part No.</b>		
	可参考: 1.0.1 Reference: 1.0.1	----- ----- -----	
		<b>1</b> 型号 Form	<b>2</b> 电缆类型 Cable type
			<b>3</b> 电缆长度 Cable length
	<b>备注 Notes</b>	电缆参数 Cable parameter: 1.0.7 配件及技术页面 Accessories and technical page: 1.3.28 不同的电缆长度可根据实际需要, 在订货号的第三部分自行修改, 电缆长度单位: cm	

现场总线连接器