

# 现场总线连接器 PLUG CONNECTORS FOR FIELDBUS TECHNOLOGY


CC-Link  
M12 单端预铸线束  
With open ended wires M12  
屏蔽 A-Coded  
Shielded, A-coded

插针 Male  
直出 Straight

插孔 Female  
直出 Straight

插针 Male  
90°

插孔 Female  
90°

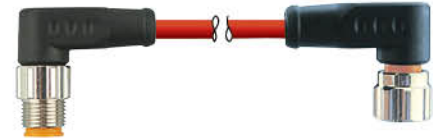

<b>1</b>	<b>型号 Form</b>	<b>No.</b>	<b>987021</b>	<b>987321</b>
	极数 Suppression		4-pole	4-pole
	电路图 Circuit diagram			
	针脚排序 Contact layout			
<b>2</b>	<b>电缆类型 Cable type</b>	<b>护套颜色 Jacket color</b>		
	芯线 Wire 3x0.5mm <sup>2</sup>		红 RD	
	PVC 固定安装 Fixed installation		760	
<b>3</b>	<b>电缆长度 Cable length</b>			
	0.3m	0030		
	0.6m	0060		
	1.0m	0100		
	1.5m	0150		
	2.0m	0200		
	<b>订货号 Part No.</b>			
	可参考: 1.0.1 Reference: 1.0.1			
		<b>1</b> 型号 Form	<b>2</b> 电缆类型 Cable type	<b>3</b> 电缆长度 Cable length
<b>备注 Notes</b>				
	电缆参数 Cable parameter: 1.0.7      配件页面 Accessories on page: 1.3.33 不同的电缆长度可根据实际需要, 在订货号的第三部分自行修改, 电缆长度单位: cm			