


AS-i Passive Distributor

刺破
Insulation penetration
technology


插孔 Female
直出 Straight




1 型号 Form No. 912909

极数
Suppression 5-pole

电路图
Circuit diagram




针脚排序
Contact layout



2 技术参数 Technical data


额定电压 Supply voltage	10 ... 32 V _{DC} PELV
额定电流 Current per contact (40°C)	max. ≤ 4 A
外壳材料 Housing material	阻燃塑料 Flame retardant plastic
压线方式 Wiring method	刺破 Insulation penetration technology
防护等级 Protection	IP67- 插孔插针配合拧紧 (EN 60529) When pluggde and screwed down
温度范围 Temperature range	-30 ... 70 °C

尺寸图 Description

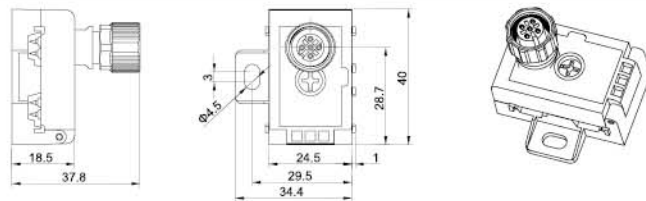

订货号 Part No.

可参考: 1.0.1
Reference: 1.0.1



1 型号 Form

备注 Notes

配件及技术参数页面 Accessories and technical page: 1.2.46


AS-i Passive Distributor

刺破
Insulation penetration
technology

插孔 Female
直出 Straight



max 8A/4A



1	型号 Form	No. 912929	912939
	极数 Suppression	5-pole	5-pole
	电路图 Circuit diagram		
	针脚排序 Contact layout		
2	技术参数 Technical data		
	额定电压 Supply voltage	10 ... 32 V _{DC} PELV	
	额定电流 Current per contact (40°C)	≤4 A at each M12 connection	≤1 A at each M12 connection
		2 x 4 A changeable fuses for AS-i and AUX for each M12 connection	2 x 1 A self-resetting fuses for AS-i and AUX for each M12 connection
	压线方式 Wiring method	刺破 Insulation penetration technology	
	防护等级 Protection	IP67– 插孔插针配合拧紧 (EN 60529) When pluggde and screwed down	
	温度范围 Temperature range	-30 ... 70°C	
	尺寸图 Description		
	订货号 Part No.		
	可参考: 1.0.1 Reference: 1.0.1		
		1	型号 Form
	备注 Notes		
		配件及技术参数页面 Accessories and technical page: 1.2.46	


AS-i Passive Distributor

刺破
Insulation penetration
technology

插孔 Female
直出 Straight





max 4A




1 型号 Form No. 912959

极数
Suppression 5-pole

电路图
Circuit diagram



针脚排序
Contact layout



2 技术参数 Technical data

额定电压 Supply voltage	10 ... 32 V _{DC} PELV
额定电流 Current per contact (40°C)	max. ≤ 1 A
	1 A self-resetting fuses for AS-i and AUX for each M12 connection
压线方式 Wiring method	刺破 Insulation penetration technology
防护等级 Protection	IP67- 插孔插针配合拧紧 (EN 60529) When pluggde and screwed down
温度范围 Temperature range	-30 °C ... 55°C

尺寸图 Description

订货号 Part No.

可参考: 1.0.1
Reference: 1.0.1



1 型号 Form

备注 Notes

配件及技术参数页面 Accessories and technical page: 1.2.46