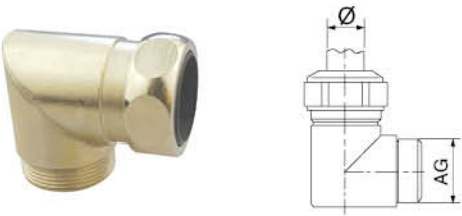


名称 Identification	规格 (AG) Designation	D	L	B	H	型号 Type	订货号 Part No.
带内螺纹和外螺纹弯接头 	PG7	16	7	23	21	STUD-7-MS	62307101
	PG9	18	7	26	24	STUD-9-MS	62309101
	PG11	22	8	31	29	STUD-11-MS	62311101
	PG13	24	10	34	31	STUD-13-MS	62313101
	PG16	26	10	36	33	STUD-16-MS	62316101
	PG21	34	11	44	41	STUD-21-MS	62321101
	PG29	41	11	52	49	STUD-29-MS	62329101
	PG36	52	12	82	64	STUD-36-MS	62336101
	M12×1.5	15	5.0	25	20	STUD-12-M	62312102
	M16×1.5	19	6.5	29	26	STUD-16-M	62316102
	M20×1.5	24	6.0	37	31	STUD-20-M	62320102
	M25×1.5	29	7.5	42	37	STUD-25-M	62325102
	M32×1.5	36	8.5	40	44	STUD-32-M	62332102
	M40×1.5	46	9.5	67	57	STUD-40-M	62340102
	M50×1.5	56	9.0	77	69	STUD-50-M	62350102

材料 Material: 黄铜镀镍 Nickel plated brass
 O-ring 形密封圈: NBR
 工作温度 Temperature range: -40°C to +100°C

名称 Identification	规格 (AG) Designation	夹线范围 (Φ) Clamping range(mm)	型号 Type	订货号 Part No.
90 度弯曲接头 	PG9	6.0-10.5	STUM-9-MS	62409101
	PG11	5.5-12.0	STUM-11-MS	62411101
	PG13	8.0-15.0	STUM-13-MS	62413101
	PG16	8.0-15.0	STUM-16-MS	62416101
	PG21	12.5-20.5	STUM-21-MS	62421101
	PG29	19.0-27.5	STUM-29-MS	62429101
	M16×1.5	6.0-10.5	STUM-16-M	62416102
	M20×1.5	8.0-15.0	STUM-20-M	62420102
	M25×1.5	12.5-20.5	STUM-25-M	62425102
	M32×1.5	17.0-25.5	STUM-32-M	62432102
	M40×1.5	24.0-33.0	STUM-40-M	62440102

材料 Material: 黄铜镀镍 Nickel plated brass
 密封件 Seal material: TPE
 消除引力: 根据 EN50262,A 类
 工作温度 Temperature range: -40°C to +100°C
 防护等级 Protection degree: 加密封垫圈可达 IP68