


电缆旋紧件及各类电缆附件 CABLE GLANDS AND ACCESSORIES

电缆接头

名称 Identification	规格 (AG) Designation	适配软管 (AD) Suitable conduits	内径 (d) Interior	型号 Type	订货号 Part No.
快速塑料软管接头 Nylon flexible tube fittings	PG7	AD10.0	7	QSC-7-PS	61707101
	PG9	AD13.0	10	QSC-9-PS	61709101
	PG11	AD15.8	12	QSC-11-PS	61711101
	PG13.5	AD18.5	14	QSC-13-PS	61713101
	PG16	AD21.2	17	QSC-16-PS	61716101
	PG21	AD28.5	23.5	QSC-21-PS	61721101
	PG29	AD34.5	30	QSC-29-PS	61729101
	PG36	AD42.5	36.5	QSC-36-PS	61736101
	PG48	AD54.5	48	QSC-48-PS	61748101
	M12×1.5	AD10.0	7.0	QSC-12-P	61712102
	M16×1.5	AD13.0	10	QSC-16-P	61716102
	M20×1.5	AD18.5	14.5	QSC-20-PT	61720112
	M20×1.5	AD21.2	15.5	QSC-20-P	61720102
	M25×1.5	AD21.2	17	QSC-25-PT	61725112
	M25×1.5	AD28.5	20.5	QSC-25-P	61725102
	M32×1.5	AD28.5	23.5	QSC-32-PT	61732112
	M32×1.5	AD34.5	26	QSC-32-P	61732102
	M40×1.5	AD34.5	28.5	QSC-40-PT	61740112
	M40×1.5	AD42.5	33	QSC-40-P	61740102
	M50×1.5	AD42.5	36.5	QSC-50-PT	61750112
M50×1.5	AD54.5	43	QSC-50-P	61750102	
M63×1.5	AD54.5	43	QSC-63-P	61763102	

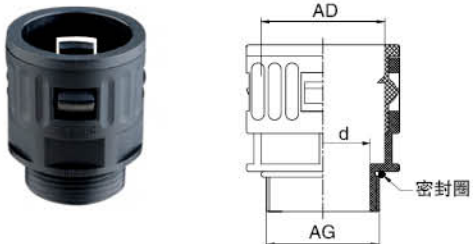

防护等级 Protection degree: IP65
 密封件 Seal material: 尼龙 PA
 工作温度 Temperature range: -40°C to +100°C

名称 Identification	规格 specifications	适配软管 1 Suitable conduits	适配软管 2 Suitable conduits	型号 Type	订货号 Part No.
Y 型三通快速接头 Type quick nipple	PG9	AD10.0	2×AD10.0	PY-AD1010	61809101
	PG11	AD21.2	2×AD15.8	PY-AD2115	61811101
	PG13.5	AD28.5	2×AD15.8	PY-AD2815	61813101
	PG16	AD18.5	2×AD18.5	PY-AD1818	61816101
	PG21	AD21.2	2×AD21.2	PY-AD2121	61821101
	PG29	AD28.5	2×AD21.2	PY-AD2821	61829101
	PG36	AD34.5	2×AD28.5	PY-AD3428	61836101
	PG42	AD42.5	2×AD34.5	PY-AD4234	61842101
	PG48	AD54.5	2×AD42.5	PY-AD5442	61848101



材料 Material: PA6
 工作温度 Temperature range: -40°C to +120°C, 短时间 150°C
 防护等级 Protection degree: IP65

名称 Identification	英制 Inch	适配软管外径 Outer Ø	内径 (d) Interior	型号 Type	订货号 Part No.	包装规格 PU
PA6 尼龙软管 conduit	G1/4	AD10.0	6.5	PT-AD10	62909110	200 m
	G3/8	AD13.0	10.0	PT-AD13	62911113	100 m
	G3/8	AD15.8	12.0	PT-AD15	62913116	100 m
	G1/2	AD18.5	14.3	PT-AD18	62916118	100 m
	G1/2	AD21.2	17.0	PT-AD21	62921121	100 m
	G3/4	AD28.5	23.0	PT-AD28	62929128	100 m
	G1	AD34.5	29.0	PT-AD34	62936134	50 m
	G1 1/4	AD42.5	36.0	PT-AD42	62942142	50 m
	G2	AD54.5	48.0	PT-AD54	62948154	25 m



材料 Material: PA
 工作温度 Temperature range: -40°C to +115°C, 短时间 150°C
 应用场合: 机床、机器制造、电气控制系统等。
 Application range: mechanical engineering, apparatus construction, electrical control system etc.