

D-SUB 25/44 Pin 连接器

屏蔽 Shielded
 压接或焊接
 Crimp / solder pins
 壳体规格 Size: Size3

插针 Male
 180°



插孔 Female
 180°



1 型号 Form	焊接式 Solder	900025	900044	901025	901044
	压接式 Crimp	900125		902025	
极数 Suppression		25-pole	44-pole	25-pole	44-pole
电路图 Circuit diagram		插针 Male 25 Pin 	插针 Male 44 Pin 	插孔 Female 25 Pin 	插孔 Female 44 Pin
压线范围 Wire diameter		8...11mm			

2 技术参数 Technical data	额定电压 Supply voltage	30V AC/DC
	额定电流 Current per contact (40°C)	2A
	温度范围 Temperature range	- 25...+ 85 °C
	压线方式 Wiring method	冷压压接 (冷压针见下表) Crimp terminal


针 Crimp contacts

技术参数 Technical data
 材质 Material: 铜镀银/金
 Copper alloy silver/gold-plated
 接触电阻 Contact resistance: ≤ 4 mΩ
 接线形式 Terminal: 冷压接线 Crimp terminal

冲压针 Stamped Contacts



车针 Machined Contacts

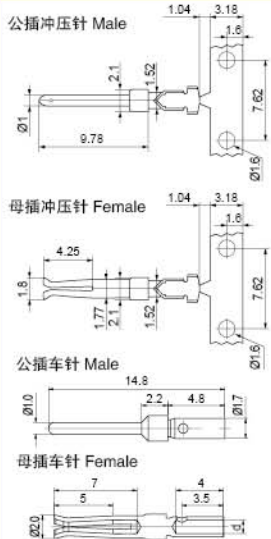

线径 Wire	AWG	冲压针 Stamped Contacts (500 pieces / 卷 reel)		车针 Machined Contacts (100 pieces / 包 pu)	
		型号 Form	订货号 Part No.	型号 Form	订货号 Part No.
0.09-0.25mm ²	26-22	SAM-13	3 67 000 7167	DAM-13	3 67 000 5576
0.25-0.56mm ²	22-20	SAM-33	3 67 000 8167	DAM-33	3 67 000 8576
0.09-0.25mm ²	26-22	SAF-13	3 67 000 7267	DAF-13	3 67 000 5476
0.25-0.56mm ²	22-20	SAF-33	3 67 000 8267	DAF-33	3 67 000 8476

备注 Notes

D-SUB 25/44 Pin 连接器



屏蔽 Shielded
压接或焊接
Crimp / solder pins
壳体规格 Size: Size3G

插针 Male
45°



插孔 Female
45°



1	型号 Form 焊接式 Solder	910025	910044	911025	911044																																	
	压接式 Crimp	910125		912025																																		
	极数 Suppression	25-pole	44-pole	25-pole	44-pole																																	
	电路图 Circuit diagram	<p>插针 Male 25 Pin</p>	<p>插针 Male 44 Pin</p>	<p>插孔 Female 25 Pin</p>	<p>插孔 Female 44 Pin</p>																																	
	压线范围 Wire diameter	8...11mm																																				
2	技术参数 Technical data	<p>额定电压 Supply voltage 30V AC/DC</p> <p>额定电流 Current per contact (40°C) 2A</p> <p>温度范围 Temperature range - 25...+ 85 °C</p> <p>压线方式 Wiring method 冷压压接 (冷压针见下表) Crimp terminal</p>																																				
	针 Crimp contacts	<table border="1"> <thead> <tr> <th rowspan="2">线径 Wire</th> <th rowspan="2">AWG</th> <th colspan="2">冲压针 Stamped Contacts (500 pieces / 卷 reel)</th> <th colspan="2">车针 Machined Contacts (100 pieces / 包 pu)</th> </tr> <tr> <th>型号 Form</th> <th>订货号 Part No.</th> <th>型号 Form</th> <th>订货号 Part No.</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25mm²</td> <td>26-22</td> <td>SAM-13</td> <td>3 67 000 7167</td> <td>DAM-13</td> <td>3 67 000 5576</td> </tr> <tr> <td>0.25-0.56mm²</td> <td>22-20</td> <td>SAM-33</td> <td>3 67 000 8167</td> <td>DAM-33</td> <td>3 67 000 8576</td> </tr> <tr> <td>0.09-0.25mm²</td> <td>26-22</td> <td>SAF-13</td> <td>3 67 000 7267</td> <td>DAF-13</td> <td>3 67 000 5476</td> </tr> <tr> <td>0.25-0.56mm²</td> <td>22-20</td> <td>SAF-33</td> <td>3 67 000 8267</td> <td>DAF-33</td> <td>3 67 000 8476</td> </tr> </tbody> </table>				线径 Wire	AWG	冲压针 Stamped Contacts (500 pieces / 卷 reel)		车针 Machined Contacts (100 pieces / 包 pu)		型号 Form	订货号 Part No.	型号 Form	订货号 Part No.	0.09-0.25mm ²	26-22	SAM-13	3 67 000 7167	DAM-13	3 67 000 5576	0.25-0.56mm ²	22-20	SAM-33	3 67 000 8167	DAM-33	3 67 000 8576	0.09-0.25mm ²	26-22	SAF-13	3 67 000 7267	DAF-13	3 67 000 5476	0.25-0.56mm ²	22-20	SAF-33	3 67 000 8267	DAF-33
线径 Wire	AWG	冲压针 Stamped Contacts (500 pieces / 卷 reel)		车针 Machined Contacts (100 pieces / 包 pu)																																		
		型号 Form	订货号 Part No.	型号 Form	订货号 Part No.																																	
0.09-0.25mm ²	26-22	SAM-13	3 67 000 7167	DAM-13	3 67 000 5576																																	
0.25-0.56mm ²	22-20	SAM-33	3 67 000 8167	DAM-33	3 67 000 8576																																	
0.09-0.25mm ²	26-22	SAF-13	3 67 000 7267	DAF-13	3 67 000 5476																																	
0.25-0.56mm ²	22-20	SAF-33	3 67 000 8267	DAF-33	3 67 000 8476																																	
	技术参数 Technical data	<p>材质 Material: 铜镀银/金 Copper alloy silver/gold-plated</p> <p>接触电阻 Contact resistance: ≤ 4 mΩ</p> <p>接线形式 Terminal: 冷压接线 Crimp terminal</p>																																				
	冲压针 Stamped Contacts	<p>公插冲压针 Male</p> <p>母插冲压针 Female</p>																																				
	车针 Machined Contacts	<p>公插车针 Male</p> <p>母插车针 Female</p>																																				
	备注 Notes																																					