














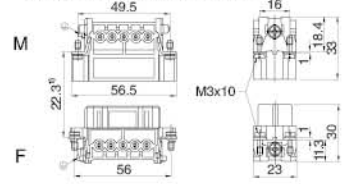



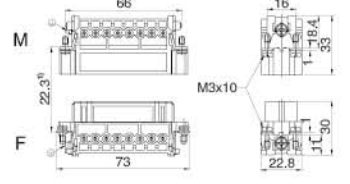



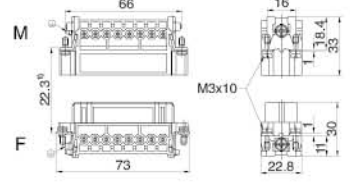


HA-003,HA-004 小型接插体 CONNECT THE SMALL BODY

适配壳体 H3A, 详见 6.12.3 页 Suitable for H3A housing, see page 6.12.3

	型号 Type	订货号 Part No.		尺寸图 Drawing (mm)
		公接插针 Male insert	母接插针 Female insert	
接线方式: 螺钉压接 Termination methods: Screw terminal  M F 额定电流 Rated current: 10 A 额定电压 Rated voltage: 250 V 线规 Wire gauge: 0.5-2.5 mm ²	HA-003-M	1200032611		 M
	HA-003-F		1200032711	 F
接线方式: 弹片压接 Termination methods: Cage-clamp terminal  M F 额定电流 Rated current: 10 A 额定电压 Rated voltage: 400 V 线规 Wire gauge: 0.5-2.5 mm ²	HAS-003-M	1200032633		 M
	HAS-003-F		1200032733	 F
接线方式: 螺钉压接 Termination methods: Screw terminal  M F 额定电流 Rated current: 10 A 额定电压 Rated voltage: 250 V 线规 Wire gauge: 0.5-2.5 mm ²	HA-004-M	1200042611		 M
	HA-004-F		1200042711	 F
接线方式: 弹片压接 Termination methods: Cage-clamp terminal  M F 额定电流 Rated current: 10 A 额定电压 Rated voltage: 400 V 线规 Wire gauge: 0.5-2.5 mm ²	HAS-004-M	1200042633		 M
	HAS-004-F		1200042733	 F

接插体













HA-010, HA-016, HA-032 小型接插体 CONNECT THE SMALL BODY

	型号 Type	订货号 Part No.		尺寸图 Drawing (mm)
		公接插针 Male insert	母接插针 Female insert	
<p>接线方式: 螺钉压接 Termination methods: Screw terminal</p>  <p>M F</p>	HA-010-M	1200102612		<p>1) 接插体之间最大距离 24mm Distance for contact max. 24mm</p>  <p>接插针排序 Contact arrangement</p>  <p>面板安装开孔图 Panel cut out</p> 
<p>额定电流 Rated current: 16 A 额定电压 Rated voltage: 250 V 线规 Wire gauge: 0.5-2.5 mm² 适配 H10A 外壳, 详见 6.12.7 页 Suitable for H10A housing, see page 6.12.7</p>	HA-010-F		1200102812	
<p>接线方式: 螺钉压接 Termination methods: Screw terminal</p>  <p>M F</p>	HA-016-M	1200162612		<p>1) 接插体之间最大距离 24mm Distance for contact max. 24mm</p>  <p>接插针排序 Contact arrangement</p>  <p>面板安装开孔图 Panel cut out</p> 
<p>额定电流 Rated current: 16 A 额定电压 Rated voltage: 250 V 线规 Wire gauge: 0.5-2.5 mm² 适配 H16A 外壳, 详见 6.12.8 页 Suitable for H16A housing, see page 6.12.8</p>	HA-016-F		1200162812	
<p>接线方式: 螺钉压接 Termination methods: Screw terminal</p>  <p>M F</p>	HA-016-M (1-16) HA-016-MD (17-32)	1200162612 1200162613		<p>1) 接插体之间最大距离 24mm Distance for contact max. 24mm</p>  <p>接插针排序 Contact arrangement</p>  <p>面板安装开孔图 Panel cut out</p> 
<p>额定电流 Rated current: 16 A 额定电压 Rated voltage: 250 V 线规 Wire gauge: 0.5-2.5 mm² 适配 H32A 外壳, 详见 6.12.9 页 Suitable for H10A housing, see page 6.12.9</p>	HA-016-F (1-16) HA-016-FD (17-32)		1200162812 1200162813	

接插体

HAS-010,HAS-016,HAS-032 小型接插体 CONNECT THE SMALL BODY

适配壳体 H3A, 详见 6.12.3 页 Suitable for H3A housing, see page 6.12.3

		订货号 Part No.		尺寸图 Drawing (mm)	
		公接插针 Male insert	母接插针 Female insert		
<p>接线方式: 弹片压接 Termination methods: Cage-clamp terminal</p>  <p>M F</p>	HAS-010-F	1200102633	 <p>M F</p>	<p>接插针排序 Contact arrangement</p> 	<p>面板安装开孔图 Panel cut out</p> 
	<p>额定电流 Rated current: 16 A 额定电压 Rated voltage: 250 V 线规 Wire gauge: 0.14-2.5 mm²</p>	HAS-010-M			
<p>接线方式: 弹片压接 Termination methods: Cage-clamp terminal</p>  <p>M F</p>	HAS-016-F	1200162633	 <p>M F</p>	<p>接插针排序 Contact arrangement</p> 	<p>面板安装开孔图 Panel cut out</p> 
	<p>额定电流 Rated current: 16 A 额定电压 Rated voltage: 250 V 线规 Wire gauge: 0.14-2.5 mm²</p>	HAS-016-M			
<p>接线方式: 弹片压接 Termination methods: Cage-clamp terminal</p>  <p>M F</p>	HAS-016-M (1-16) HAS-016-MD (17-32)	1200162633 1200162634	 <p>M F</p>	<p>接插针排序 Contact arrangement</p> 	<p>面板安装开孔图 Panel cut out</p> 
	<p>额定电流 Rated current: 16 A 额定电压 Rated voltage: 250 V 线规 Wire gauge: 0.14-2.5 mm²</p>	HAS-016-F (1-16) HAS-016-FD (17-32)			

接插体