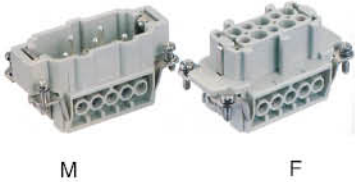
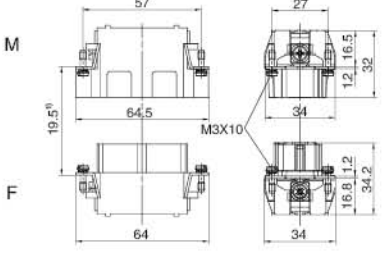


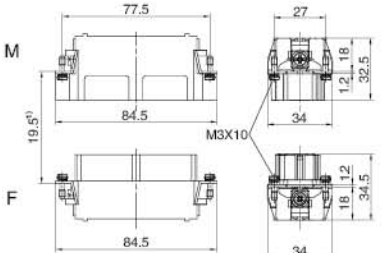


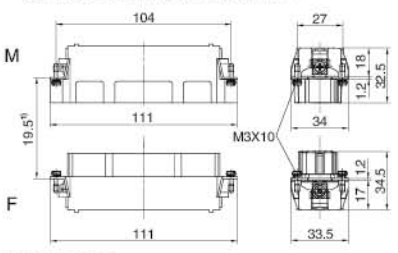



HVE 高电压型接插体 CONNECT THE HIGH VOLTAGE TYPE BODY

额定电流 Rated current: 23 A 额定电压 Rated voltage: 830 V

接插体

	型号 Type	订货号 Part No.		尺寸图 Drawing (mm)
		公接插针 Male insert	母接插针 Female insert	
<p>保险针 Safe high voltage connections 接线方式: 螺钉压接 Termination methods: Screw terminal</p>  <p>M F</p>	HVE-003+2-M	1340032601		<p>1) 接插体之间最大距离 21mm Distance for contact max. 21mm</p>  <p>接插针排序 Contact arrangement</p>  <p>M F</p>
<p>线规 Wire gauge: 0.5-4.0 mm² 适配 H10B 外壳, 详见 6.13.4 页 Suitable for H10B housing, see page 6.13.4</p>	HVE-003+2-F		1340032701	
<p>保险针 Safe high voltage connections 接线方式: 螺钉压接 Termination methods: Screw terminal</p>  <p>M F</p>	HVE-006+2-M	1340062601		<p>1) 接插体之间最大距离 21mm Distance for contact max. 21mm</p>  <p>接插针排序 Contact arrangement</p>  <p>M F</p>
<p>线规 Wire gauge: 0.5-4.0 mm² 适配 H16B 外壳, 详见 6.13.10 页 Suitable for H16B housing, see page 6.13.10</p>	HVE-006+2-F		1340062701	
<p>保险针 Safe high voltage connections 接线方式: 螺钉压接 Termination methods: Screw terminal</p>  <p>M F</p>	HVE-010+2-M	1340102601		<p>1) 接插体之间最大距离 21mm Distance for contact max. 21mm</p>  <p>接插针排序 Contact arrangement</p>  <p>M F</p>
<p>线规 Wire gauge: 0.5-4.0 mm² 适配 H24B 外壳, 详见 6.13.16 页 Suitable for H24B housing, see page 6.13.16</p>	HVE-010+2-F		1340102701	