
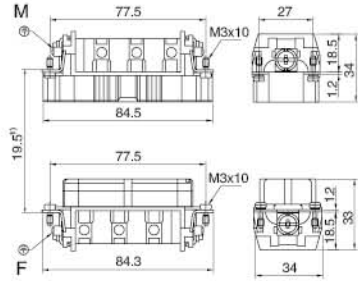


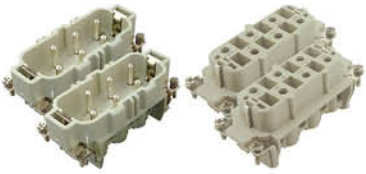
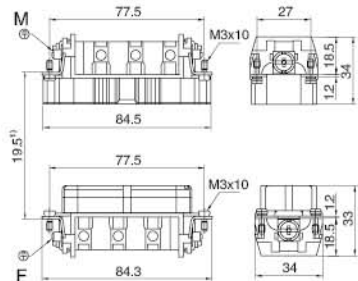




HSB-006, HSB-012 大电流型 CONNECTORS FOR HIGHER CURRENT

额定电流 Rated current: 35 A 额定电压 Rated voltage: 690 V

		型号 Type	订货号 Part No.		尺寸图 Drawing (mm)
			公接插针 Male insert	母接插针 Female insert	
<p>接线方式: 螺钉压接 Termination methods: Screw terminal</p>  <p>M F</p>	HSB-006-M	1310062601		<p>1) 接插体之间最大距离 21mm Distance for contact max. 21mm</p>  <p>接插针排序 Contact arrangement</p>  <p>面板安装开孔图 Panel cut out</p> 	
	<p>线规 Wire gauge: 0.5-6.0 mm² 适配 H16B 外壳, 详见 6.1310 页 Suitable for H16B housing, see page 6.13.10</p>	HSB-006-F		1310062701	
<p>接线方式: 螺钉压接 Termination methods: Screw terminal</p>  <p>M F</p>	HSB-006-M (1-6) HSB-006-MD (7-12)	1310062601 1310062611		<p>1) 接插体之间最大距离 21mm Distance for contact max. 21mm</p>  <p>接插针排序 Contact arrangement</p>  <p>面板安装开孔图 Panel cut out</p> 	
	<p>线规 Wire gauge: 0.5-6.0 mm² 适配 H32B 外壳, 详见 6.13.22 页 Suitable for H32B housing, see page 6.13.22</p>	HSB-006-F (1-6) HSB-006-FD (7-12)		1310062701 1310062711	