

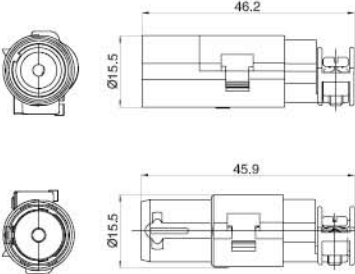


HM-Q 电磁屏蔽模块 ELECTROMAGNETIC SHIELDING MODULE

接插体

接线方式: 冷压针压接 Termination methods: Crimp terminal (冷压针请单独订购 Order crimp contacts separately)	型号 Type	订货号 Part No.		尺寸图 Drawing (mm)
		公接插针 Male insert	母接插针 Female insert	
 <p>M F</p> <p>额定电流 Rated current: 10A 线规 Wire gauge: 0.14-2.5mm²</p>	HM-Q2-M	5140023001		 <p>M F</p>
	HM-Q2-F		5140023101	
接线方式: 冷压针压接 Termination methods: Crimp terminal (冷压针请单独订购 Order crimp contacts separately)	Quintax-001-M	5150013023		 <p>M F</p>
	Quintax-001-F		5150013123	

16A 插针 Contacts

技术参数 Technical data

材质: 铜镀银 / 金

Material: Copper, hard silver / gold plated

接触电阻 Contact resistance: $\leq 1\text{m}\Omega$

接线形式: 冷压接线

Termination methods: Crimp connection

CEM



DEM




CEF




DEF



16A 公插针 Male



16A 母插针 Female









线径 (mm ²) Wire gauge	接线长度 Stripping length	镀银冷压针 Crimp contacts, silver-plated		镀金冷压针 Crimp contacts, gold-plated		
		型号 Type	订货号 Part No.	型号 Type	订货号 Part No.	
0.14-0.37	AWG26-22	7.5mm	CEM-0.37	3330006127	DEM-0.37	3330006117
0.5	AWG20	7.5mm	CEM-0.5	3330006121	DEM-0.5	3330006122
0.75	AWG18	7.5mm	CEM-0.75	3330006114	DEM-0.75	3330006115
1.0	AWG18	7.5mm	CEM-1.0	3330006105	DEM-1.0	3330006118
1.5	AWG16	7.5mm	CEM-1.5	3330006104	DEM-1.5	3330006116
2.5	AWG14	7.5mm	CEM-2.5	3330006102	DEM-2.5	3330006123
4.0	AWG12	7.5mm	CEM-4.0	3330006107	DEM-4.0	3330006119

线径 (mm ²) Wire gauge	接线长度 Stripping length	镀银冷压针 Crimp contacts, silver-plated		镀金冷压针 Crimp contacts, gold-plated		
		型号 Type	订货号 Part No.	型号 Type	订货号 Part No.	
0.14-0.37	AWG26-22	7.5mm	CEF-0.37	3330006227	DEF-0.37	3330006217
0.5	AWG20	7.5mm	CEF-0.5	3330006221	DEF-0.5	3330006222
0.75	AWG18	7.5mm	CEF-0.75	3330006214	DEF-0.75	3330006215
1.0	AWG18	7.5mm	CEF-1.0	3330006205	DEF-1.0	3330006218
1.5	AWG16	7.5mm	CEF-1.5	3330006204	DEF-1.5	3330006216
2.5	AWG14	7.5mm	CEF-2.5	3330006202	DEF-2.5	3330006223
4.0	AWG12	7.5mm	CEF-4.0	3330006207	DEF-4.0	3330006219

HM-Q 电磁屏蔽模块 ELECTROMAGNETIC SHIELDING MODULE



接线方式: 冷压针压接 Termination methods: Crimp terminal (冷压针请单独订购 Order crimp contacts separately)	型号 Type	订货号 Part No.		尺寸图 Drawing (mm)
		公接插针 Male insert	母接插针 Female insert	
 <p>M F</p> <p>额定电流 Rated current: 10A 额定电压 Rated voltage: 50V 线规 Wire gauge: 0.5-2.5mm²</p>	Quintax-004-M	5150043023		
	Quintax-004-F		5150043113	
 <p>M F</p> <p>额定电流 Rated current: 5A 额定电压 Rated voltage: 50V 线规 Wire gauge: 0.08-0.52mm²</p>	Quintax-008-M	5150083023		
	Quintax-008-F		5150083113	

接插体

10A 插针 Contacts

技术参数 Technical data

材质: 铜镀银 / 金

Material: Copper, hard silver / gold plated

接触电阻 Contact resistance: $\leq 3m\Omega$

接线形式: 冷压接线

Termination methods: Crimp connection

CDM



DDM




CDF




DDF



10A 公插针 Male



10A 母插针 Female



线径 (mm ²) Wire gauge	接线长度 Stripping length	镀银冷压针 Crimp contacts, silver-plated 型号 Type	订货号 Part No.	镀金冷压针 Crimp contacts, gold-plated 型号 Type	订货号 Part No.
0.14-0.37	AWG26-22	8.0mm CDM-0.37	3150006104	DDM-0.37	3150006124
0.5	AWG20	8.0mm CDM-0.5	3150006103	DDM-0.5	3150006123
0.75	AWG18	8.0mm CDM-0.75	3150006105	DDM-0.75	3150006125
1.0	AWG18	8.0mm CDM-1.0	3150006102	DDM-1.0	3150006122
1.5	AWG16	8.0mm CDM-1.5	3150006101	DDM-1.5	3150006121
2.5	AWG14	8.0mm CDM-2.5	3150006106	DDM-2.5	3150006126

线径 (mm ²) Wire gauge	接线长度 Stripping length	镀银冷压针 Crimp contacts, silver-plated 型号 Type	订货号 Part No.	镀金冷压针 Crimp contacts, gold-plated 型号 Type	订货号 Part No.
0.14-0.37	AWG26-22	8.0mm CDF-0.37	3150006204	DDF-0.37	3150006224
0.5	AWG20	8.0mm CDF-0.5	3150006203	DDF-0.5	3150006223
0.75	AWG18	8.0mm CDF-0.75	3150006205	DDF-0.75	3150006225
1.0	AWG18	8.0mm CDF-1.0	3150006202	DDF-1.0	3150006222
1.5	AWG16	8.0mm CDF-1.5	3150006201	DDF-1.5	3150006221
2.5	AWG14	8.0mm CDF-2.5	3150006206	DDF-2.5	3150006226

5A 插针 Contacts

技术参数 Technical data

材质: 铜镀银 / 金

Material: Copper, hard silver / gold plated

接触电阻 Contact resistance: $\leq 4m\Omega$

接线形式: 冷压接线

Termination methods: Crimp connection

CAM



DAM




CAF




DAF



5A 公插针 Male



5A 母插针 Female



线径 (mm ²) Wire gauge	AWG	接线长度 Stripping length	镀银冷压针 Crimp contacts, silver-plated 型号 Type	订货号 Part No.	镀金冷压针 Crimp contacts, gold-plated 型号 Type	订货号 Part No.
0.13-0.33mm ²	26-22	5.0mm	CAM-13	3670005566	DAM-13	3670005576
0.33-0.52mm ²	22-20	5.0mm	CAM-33	3670008566	DAM-33	3670008576

线径 (mm ²) Wire gauge	AWG	接线长度 Stripping length	镀银冷压针 Crimp contacts, silver-plated 型号 Type	订货号 Part No.	镀金冷压针 Crimp contacts, gold-plated 型号 Type	订货号 Part No.
0.13-0.33mm ²	26-22	5.0mm	CAF-13	3670005466	DAF-13	3670005476
0.33-0.52mm ²	22-20	5.0mm	CAF-33	3670008466	DAF-33	3670008476