

M12 圆形连接器 ROUND PLUG CONNECTOR

现场接线
Field-wireable
螺钉压接
With screw terminals
屏蔽
Shielded

插针 Male
90°



插孔 Female
90°



1 极数 Suppression

A-Coded 订货号 Part No. 913341 5-pole 913361 4-pole 913421 5-pole 913441




B-Coded 订货号 Part No. 914011 5-pole 914031 5-pole



D-Coded 订货号 Part No. 914581 4-pole 914621 4-pole




压线范围 Wire diameter 4...6 mm 6...8 mm 4...6 mm 6...8 mm

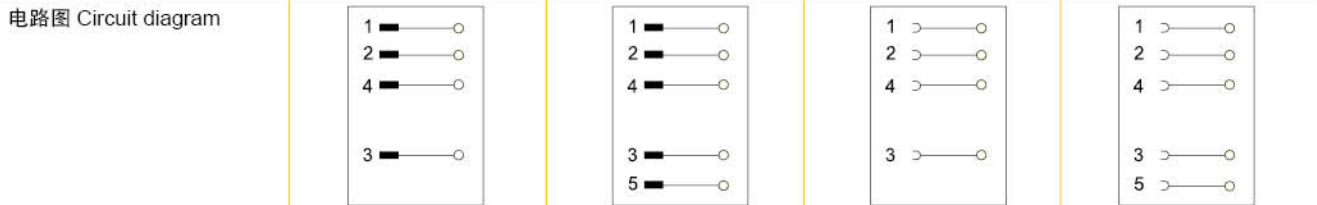

2 技术参数 Technical data

额定电压 Supply voltage	125 V AC/DC
额定电流 Current per contact (40°C)	max. 4 A
压线范围 Connection diameter	最大 max. 0.75 mm ²
外壳材料 Housing material	铜锌合金, 表面镀镍 CuZn, nickel plated
压线方式 Wiring method	螺钉压接 Screw terminals
防护等级 Protection	IP67- 插孔插针配合拧紧 (EN 60529) When plugged and screwed down
温度范围 Temperature range	-25...+85°C

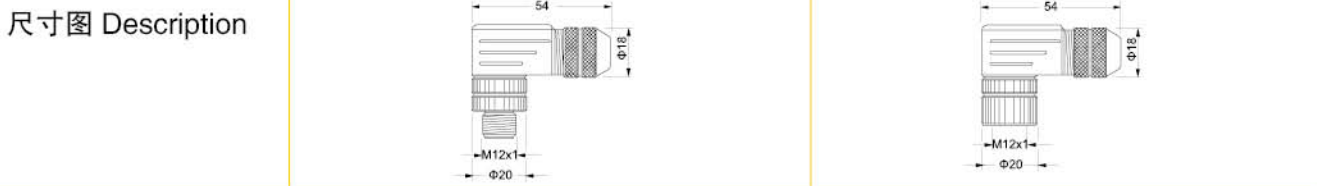

订货号 Part No.

可参考: 1.0.1
Reference: 1.0.1

1 型号 Form

备注 Notes

配件及技术参数页面 Accessories and technical page: 1.2.46

M12 圆形连接器 ROUND PLUG CONNECTOR








现场接线
Field-wireable
螺钉压接
With screw terminals
屏蔽
Shielded

插针 Male
90°



插孔 Female
90°



1	型号 Form	No.	917351	917371
	极数 Suppression		8-pole	8-pole
	电路图 Circuit diagram			
	压线范围 Wire diameter		6...8mm	6...8 mm
	针脚排序 Contact layout		<p>插针 Male</p> 	<p>插孔 Female</p> 
2	技术参数 Technical data			
	额定电压 Supply voltage	60 V AC/DC		
	额定电流 Current per contact (40°C)	2A		
	压线范围 Connection diameter	最大 max. 0.5 mm ²		
	外壳材料 Housing material	铜锌合金，表面镀镍 CuZn, nickel plated		
	压线方式 Wiring method	螺钉压接 Screw terminals		
	防护等级 Protection	IP67- 插孔插针配合拧紧 (EN 60529) When pluggde and screwed down		
	温度范围 Temperature range	-25...+85°C		
	尺寸图 Description			
	订货号 Part No.			
	可参考: 1.0.1 Reference: 1.0.1			
		1	型号 Form	
	备注 Notes			
		配件及技术参数页面 Accessories and technical page: 1.2.46		